



ENERG
енергия · ενέργεια

Y IJA
IE IA




-weishaupt-

WSB 10-A-RME-AI



55 °C

35 °C

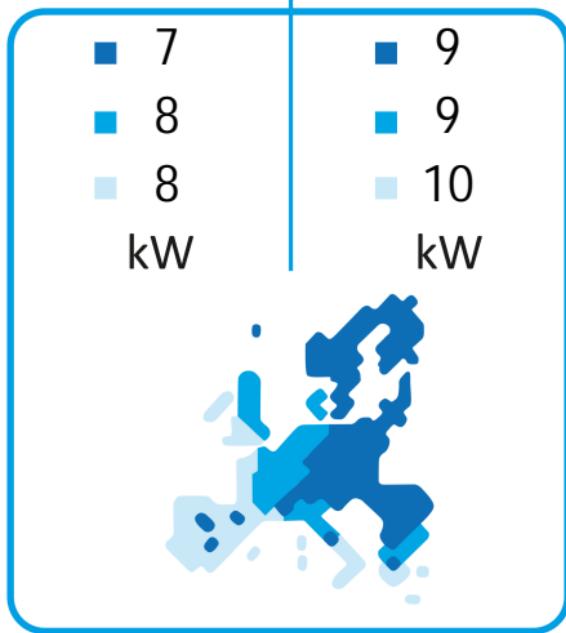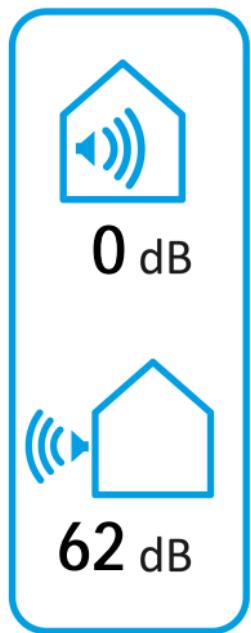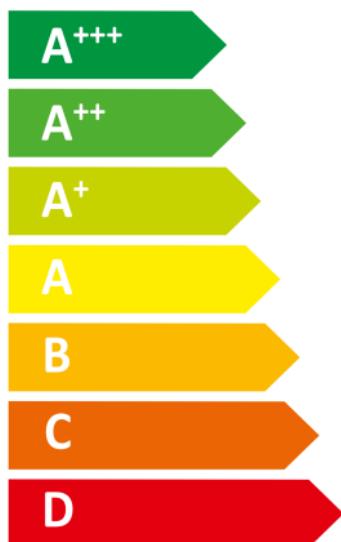

2019

811/2013

Produktdaten

Anbieter: **Max Weishaupt GmbH**
Max-Weishaupt-Straße
D-88475 Schwendi

Produkt: **Wärmeerzeuger** **WSB 10-A-RME-AI**

Die EU-Konformitätserklärung und die Anleitung (manual) liegen dem Produkt bei.

Nachstehende Produktdaten wurden auf Basis folgender Prüfgrundlagen ermittelt:

811/2013/EU, 813/2013/EU, EN 12102:2017, EN 14511:2018, EN 14825:2018

Wärmeerzeuger

Klasse für die Jahreszeitbedingte Raumheizungs-Energieeffizienz (A+++ - D)

Wärmennennleistung bei durchschnittlichen Klimaverhältnissen

Jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen

Jährlicher Energieverbrauch als Endenergie für Raumheizung bei durchschnittlichen

Klimaverhältnissen

Schallleistungspegel im Gebäude, LWA

Besondere Vorkehrungen bei der Installation

Wärmennennleistung bei kälteren Klimaverhältnissen

Wärmennennleistung bei wärmeren Klimaverhältnissen

Jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälteren Klimaverhältnissen

Jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen

Jährlicher Energieverbrauch für Raumheizung als Endenergie bei kälteren Klimaverhältnissen

Jährlicher Energieverbrauch für Raumheizung als Endenergie bei wärmeren Klimaverhältnissen

Schallleistungspegel im Freien, LWA

Temperaturanwendung			
35°C	55°C		
WSB 10-A-RME-AI			
A+++	A++		
9	8	kW	
194	134	%	
3779	4833	kWh	
	0		dB(A)
	siehe manual		
	9	7	kW
	10	8	kW
	149	114	%
	263	176	%
	5847	5888	kWh
	2005	2385	kWh
	62		dB(A)

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt GmbH		
Model:	WSB 10-A-RME-AI		
Air-to-water heat pump			
Low-temperature heat pump:	Nein		
Equipped with a supplementary heater:	Ja		
Heat pump combination heater:	Nein		
Application:	low		
Climate:	average		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit	Item	Symbol	Value
Rated heat output (*)	Prated	9	kW	Seasonal space heating energy efficiency	η_s	194	%	Degradation co-efficient (**)	Cdh	
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T_j										
$T_j = -7^\circ\text{C}$	Pdh	7,4	kW	$T_j = -7^\circ\text{C}$	COPd	3,22		$T_j = -7^\circ\text{C}$	Cdh	1,00
$T_j = +2^\circ\text{C}$	Pdh	5,0	kW	$T_j = +2^\circ\text{C}$	COPd	4,74		$T_j = +2^\circ\text{C}$	Cdh	1,00
$T_j = +7^\circ\text{C}$	Pdh	3,4	kW	$T_j = +7^\circ\text{C}$	COPd	6,63		$T_j = +7^\circ\text{C}$	Cdh	1,00
$T_j = +12^\circ\text{C}$	Pdh	3,5	kW	$T_j = +12^\circ\text{C}$	COPd	8,40		$T_j = +12^\circ\text{C}$	Cdh	0,90
$T_j = \text{bivalent temperature}$	Pdh	7,4	kW	$T_j = \text{bivalent temperature}$	COPd	3,22		For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)		
$T_j = \text{operation limit temperature}$	Pdh	7,0	kW	$T_j = \text{operation limit temperature}$	COPd	2,82				
For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)	Pdh		kW	For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)	COPd			For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)		
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C			
				Heating water operating limit temperature	WTOL	60	°C			

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,011	kW
Thermostat-off mode	P _{TO}	0,004	kW
Standby mode	P _{SB}	0,014	kW
Crankcase heater mode	P _{CK}	0,000	kW

Supplementary heater

Rated heat output (*)	Psup		kW
Type of energy input	Electricity		

Other items

Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	0 / 62	dB
Annual energy consumption	Q _{HE}	3.779	kWh

For air-to-water heat pumps: Rated air flow rate, outdoors	--	2.200	m ³ /h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--		m ³ /h

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Water heating energy efficiency	η_{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt GmbH, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

- weishaupt -

Manufacturer:	Max Weishaupt GmbH		
Model:	WSB 10-A-RME-AI		
Air-to-water heat pump			
Low-temperature heat pump:	Nein		
Equipped with a supplementary heater:	Ja		
Heat pump combination heater:	Nein		
Application:	medium		
Climate:	average		

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit	Item	Symbol	Value
Rated heat output (*)	Prated	8	kW	Seasonal space heating energy efficiency	η_s	134	%	Degradation co-efficient (**)	Cdh	
Declared capacity for heating for part load at indoor temperature 20°C and outdoor temperature T_j										
$T_j = -7^\circ\text{C}$	Pdh	6,6	kW	$T_j = -7^\circ\text{C}$	COPd	2,20		$T_j = -7^\circ\text{C}$	Cdh	1,00
$T_j = +2^\circ\text{C}$	Pdh	4,3	kW	$T_j = +2^\circ\text{C}$	COPd	3,34		$T_j = +2^\circ\text{C}$	Cdh	1,00
$T_j = +7^\circ\text{C}$	Pdh	2,9	kW	$T_j = +7^\circ\text{C}$	COPd	4,51		$T_j = +7^\circ\text{C}$	Cdh	1,00
$T_j = +12^\circ\text{C}$	Pdh	3,1	kW	$T_j = +12^\circ\text{C}$	COPd	5,70		$T_j = +12^\circ\text{C}$	Cdh	0,90
$T_j = \text{bivalent temperature}$	Pdh	6,6	kW	$T_j = \text{bivalent temperature}$	COPd	2,20		For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)		
$T_j = \text{operation limit temperature}$	Pdh	5,2	kW	$T_j = \text{operation limit temperature}$	COPd	1,56				
For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)	Pdh		kW	For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)	COPd			For air-to-water heat pumps: $T_j = -15^\circ\text{C}$ (if TOL < 20°C)		
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C			
				Heating water operating limit temperature	WTOL	60	°C			

Power consumption in modes other than active mode

Off mode	P _{OFF}	0,011	kW
Thermostat-off mode	P _{TO}	0,004	kW
Standby mode	P _{SB}	0,014	kW
Crankcase heater mode	P _{CK}	0,000	kW

Supplementary heater

Rated heat output (*)	Psup		kW
Type of energy input	Electricity		

Other items

Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	0 / 62	dB
Annual energy consumption	Q _{HE}	4.833	kWh

For air-to-water heat pumps: Rated air flow rate, outdoors	--	2.200	m ³ /h
For water-/brine-to water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	--		m ³ /h

For heat combination heater:

Declared load profile		
Daily electricity consumption	Q _{elec}	kWh

Water heating energy efficiency	η_{wh}		%
Annual electricity consumption	AEC		kWh

Contact details Max Weishaupt GmbH, Max-Weishaupt-Straße 14, 88475 Schwendi, Tel. 07353/83-0

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.